


# "THOMPSON" STRAINER

## EFFICIENCY CURVES


### INDUSTRY'S LOWEST PRESSURE DROP

All Thompson Strainers have been designed to operate with less than a 1 PSI pressure loss during flow rate when clean. This exceptional efficiency results in less energy consumption and reduced operating costs. Call us today for a free energy savings estimation.


**MLS-2 Design Flow Rate: 100 GPM**

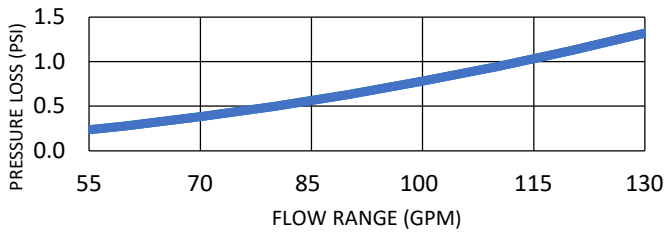


**MLS-3 Design Flow Rate: 200 GPM**

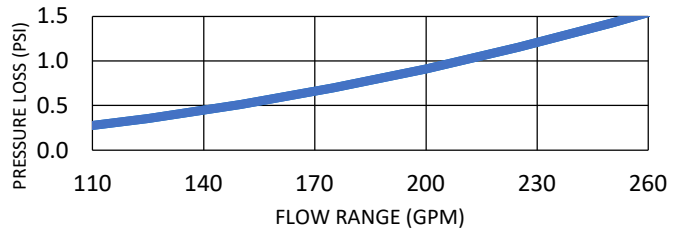


**MLS-4 Design Flow Rate: 350 GPM**

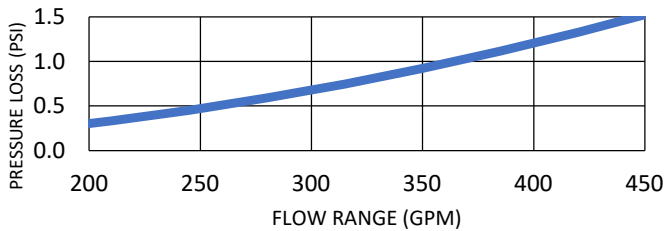


**MLS-6 Design Flow Rate: 750 GPM**

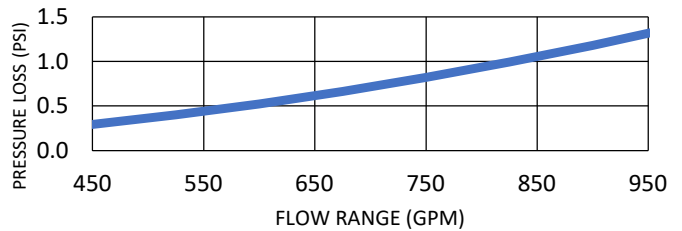


**MLS-8 Design Flow Rate: 1300 GPM**

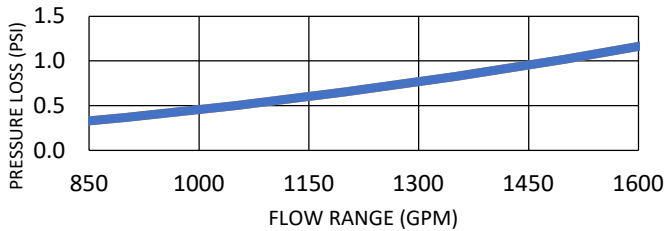


**MLS-10 Design Flow Rate: 2000 GPM**

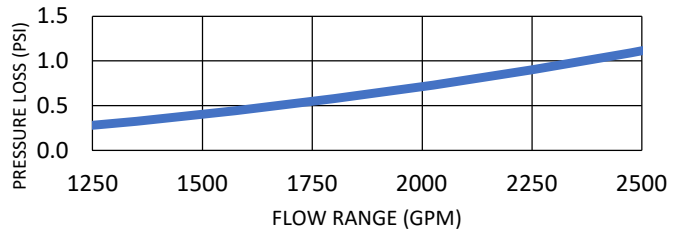

**MLS-12 Design Flow Rate: 3000 GPM**

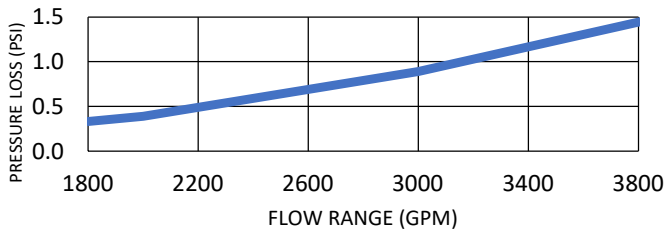

**MLS-14 Design Flow Rate: 4000 GPM**

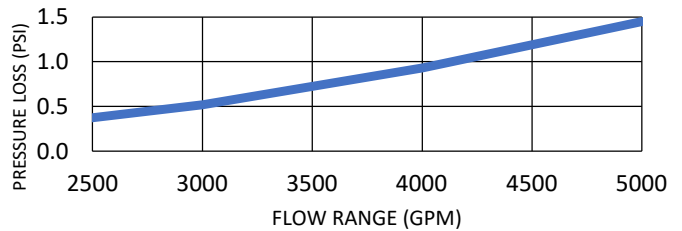

**MILLER LEAMAN**

800 Orange Ave. · Daytona Beach, FL 32114  
 tel: 386.248.0500 · toll free: 800.881.0320  
 fax: 386.248.3033 · [www.millerleaman.com](http://www.millerleaman.com)