



Audible Alarm

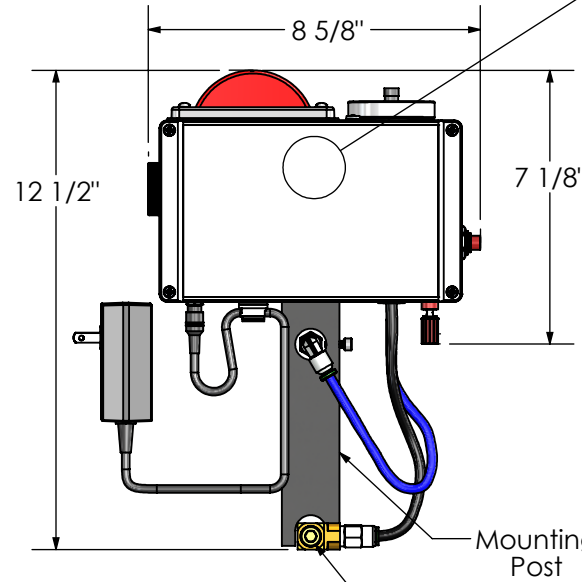


Alarm Reset Switch

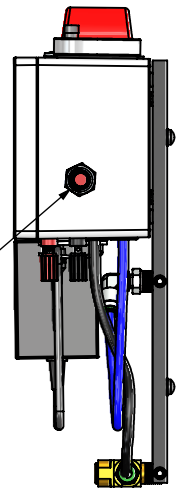

Power connection to Pressure Differential Alarm

1/4" NPT Plug - Removeable for Customer Pressure Gauge installation.

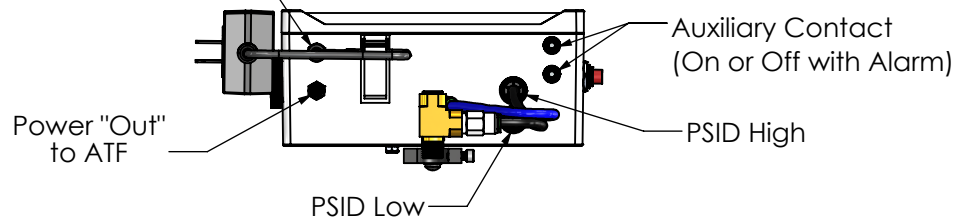

SPECIFICATIONS:

Maximum Static Pressure: 120 psi @ 73 deg.F
Maximum Readable PD: 15 psid

PD Limit: 30 psid
Power Supply: Plug-in AC/DC 25W Switching -

Input Power: 120VAC Nominal
(100-240VAC, 50/60Hz, 0.7A)

Output Power: 12VDC Nominal
(11-13VDC, 1.92-2.27A)

Output Power: 12VDC @ 1.5 Amps (ATF Power)

Alarm Setpoint: DP Gauge Knob Adjustable

Alarm Outputs -

Visual: Flashing Red Dome Light

Audible: Alternating Piezo-Electric Sounder (95dB)

Aux. Contact: Jumper Configurable Signal Output available for Customer Connection at Red &

Black Binding Posts - Maximum Load is 0.5 Amps.

Alarm Reset: Side Mounted Pushbutton

PRODUCT SPECIFICATION

MILLER LEAMAN INC

800 Orange Ave. Daytona Beach FL 32114

DRAWN	J. Larsen	10/10/05
CHECKED		
ENG APPR.		
MKT APPR.		
SHEET 1 of 1	Ref: ML20561	Rev: F

TITLE:
Pressure Differential Alarm Package # PDA